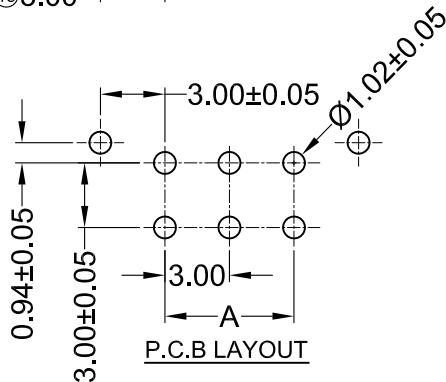
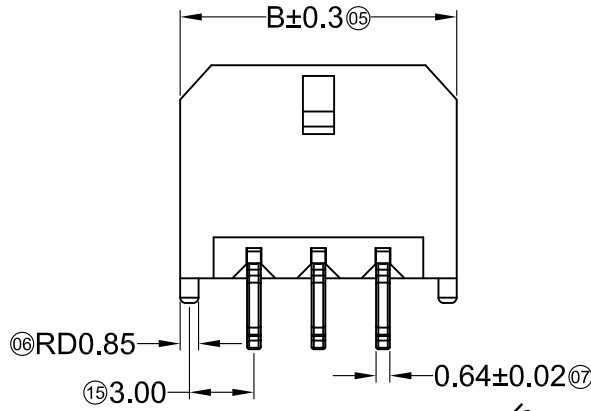
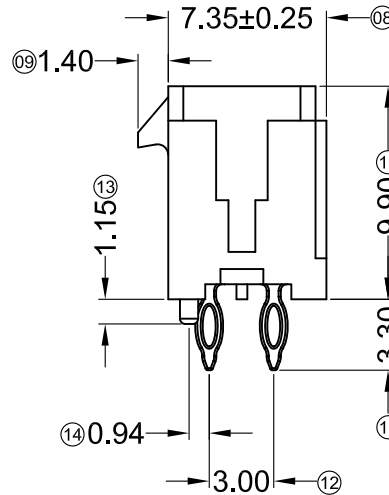

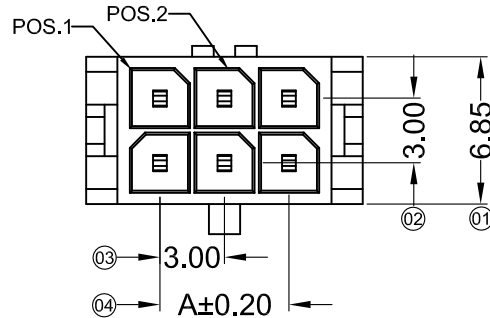


■ Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 5A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤10mΩ
- After environmental testing: ≤20mΩ

3025 W V X-2*XX CE -LP XX XX
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

- ① Series No.
- ② Category: W-WAFER
- ③ Welding Board Angle: V-Straight 180°
- ④ Welding Way: Blank-DIP
- ⑤ Row No.-Pin No.: 2*XX-2*01P~2*22P
- ⑥ Plug the Pin & Special No.: CE-Press-fit Type
- ⑦ Material: LP-LCP 94V-0
- ⑧ Plating Category: SW-Matte Tin Plating;
G15-Contact Gold 15u" ; G30-Contact Gold 30u"
Ni: 50u" Min
- ⑨ Color : Blank-Natural Color Black

Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B
2*01	---	6.85	2*07	18.00	24.85
2*02	3.00	9.85	2*08	21.00	27.85
2*03	6.00	12.85	2*09	24.00	30.85
2*04	9.00	15.85	2*10	27.00	33.85
2*05	12.00	18.85	2*11	30.00	36.85
2*06	15.00	21.85	2*12	33.00	39.85

3025WV-2*XXCE-LPG15	LCP UL 94V-0	Phosphor Bronze	Gold 15u"	3025H
3025WV-2*XXCE-LPG30	LCP UL 94V-0		Gold 30u"	
3025WV-2*XXCE-LPSW	LCP UL 94V-0		Matte Tin-Plated	
PART NO	Material	Material(Pin)	Finish(Pin)	Mates With ADZL Housing

GENERAL TOLERANCE

.X ±0.30
.XX ±0.20
.XXX ±0.10

 思量连接器有限公司
ADZL CONNECTORS CO.,LTD

PART NO. SWB:3025WV-2*XXCE-LPXX

TITLE
3.00mm Press-fit Style Connectors

APPROVAL CHECK DRAWN DATA

PROJECT


Ken Wisely He Allen 2016/07/25

UNIT SCALE NUMBER REV
MM 1:1 A-106 D

DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL