


■ Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 1500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: $\geq 1000M\Omega$
- Contact resistance: $\leq 20m\Omega$
- After environmental testing: $\leq 30m\Omega$

9555 H X-2*XX A-PT XX

① ②③ ④ ⑤ ⑥ ⑦

- ① Series No.
② Category: H-HSG
③ Welding Board Angle: Blank-ordinary
④ Row No.-Pin No.: 2*XX-2*02P~2*32P
⑤ Special No.: A-Single convex (HRS 2.54)
⑥ Material: PT-PBT 94V-0
⑦ Color: Blank-Natural Color

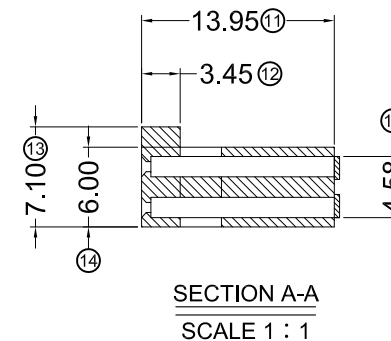

Poles	Dimensions (mm)		Poles	Dimensions (mm)		Poles	Dimensions (mm)	
	A	B		A	B		A	B
2*02	2.54	9.48	2*13	30.48	37.42	2*24	58.42	65.36
2*03	5.08	12.02	2*14	33.02	39.96	2*25	60.96	67.90
2*04	7.62	14.56	2*15	35.56	42.50	2*26	63.50	70.44
2*05	10.16	17.10	2*16	38.10	45.04	2*27	66.04	72.98
2*06	12.70	19.64	2*17	40.64	47.58	2*28	68.58	75.52
2*07	15.24	22.18	2*18	43.18	50.12	2*29	71.12	78.06
2*08	17.78	24.72	2*19	45.72	52.66	2*30	73.66	80.60
2*09	20.32	27.26	2*20	48.26	55.20	2*31	76.20	83.14
2*10	22.86	29.80	2*21	50.80	57.74	2*32	78.74	85.68
2*11	25.40	32.34	2*22	53.34	60.28			
2*12	27.94	34.88	2*23	55.88	62.82			

9555H-2*XXA-PT	PBT UL 94V-0	9555T	9555W
PART NO	Material	Suitable ADZL Terminal	Mates With ADZL Wafer

GENERAL
TOLERANCE

.X ± 0.30
.XX ± 0.20
.XXX ± 0.10

 思量连接器有限公司
ADZL CONNECTORS CO.,LTD

APPROVAL CHECK DRAWN DATA

Ken Wisely He Allen 2017/05/03




PART NO.

9555H-2*XXA-PT

TITLE

2.54 mm Crimp Style Connectors

UNIT	SCALE	NUMBER	REV
MM	1 : 1	A-039	D

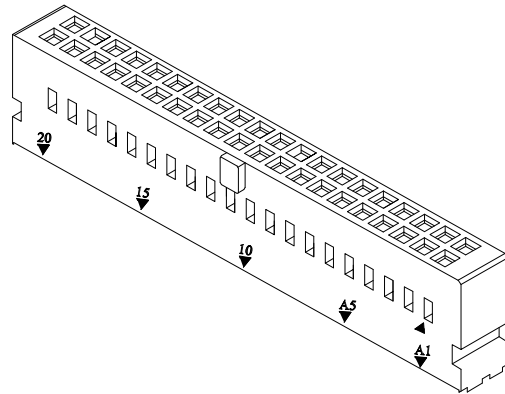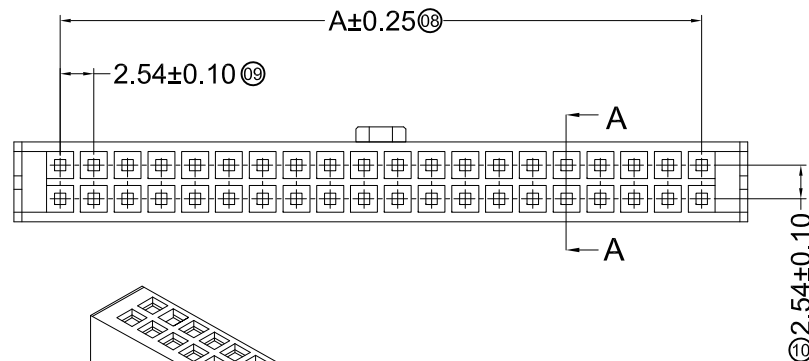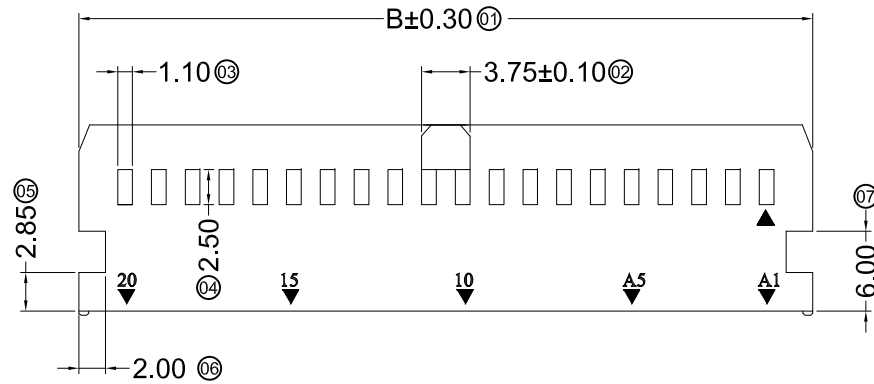

PROJECT




■ Specifications :


- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 1500V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: $\geq 1000M\Omega$
- Contact resistance: $\leq 20m\Omega$
- After environmental testing: $\leq 30m\Omega$

9555 T X-P XX X-X
① ② ③ ④ ⑤ ⑥ ⑦


- ① Series Number
② Category: T-terminal
③ Shape: Blank-ordinary
④ Material: P-Phosphor bronze
⑤ Plating style: G01-Contact Gold Flash ;
SN-Bright tin plating
⑥ Plating method: Blank-Stamping before plating
⑦ Mold No./Mark/Special No.




SECTION A-A
SCALE 1:1



SECTION B-B
SCALE 1:1

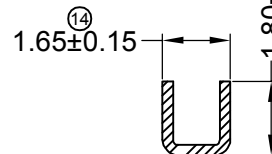

SECTION C-C
SCALE 1:1

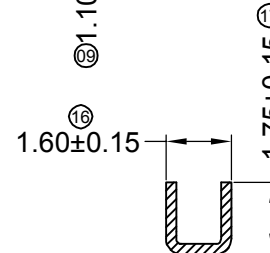

SECTION D-D
SCALE 1:1

9555T-PG01	Phosphor Bronze	AWG#22-28	Stamping Before Plating: 30u" Ni; Contact Area Gold Flash	9555H
9555T-PSN			Stamping Before Plating: 30u" Ni; 70u" Sn	
PART NO	Material	Wire Range	Finish	Used In ADZL Housing

							GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10	 思量连接器有限公司 ADZL CONNECTORS CO.,LTD				PART NO. 9555T-PXX			
												TITLE 2.54mm Crimp Style Connectors			
									APPROVAL	CHECK	DRAWN	DATA	UNIT MM	SCALE 1 : 1	NUMBER A-053
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT 	Ken	Wisely He	Allen	2021/04/25				