



RoHS

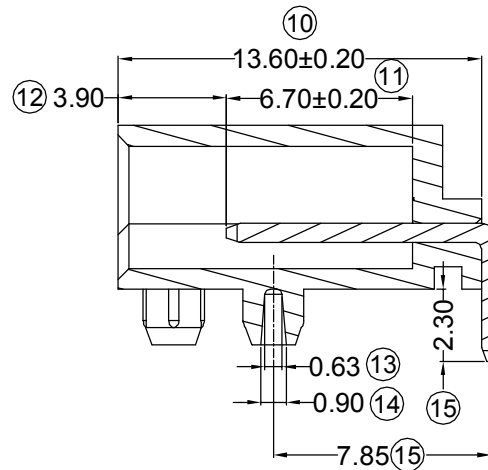



Lead-free

TEL:0769-82285488

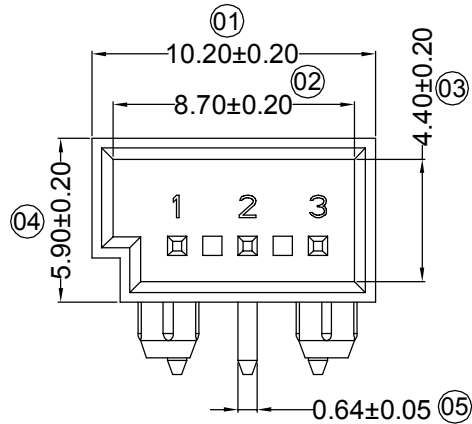

SECTION A-A

SCALE 1 : 1

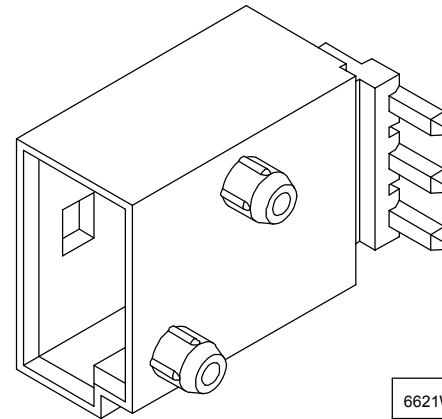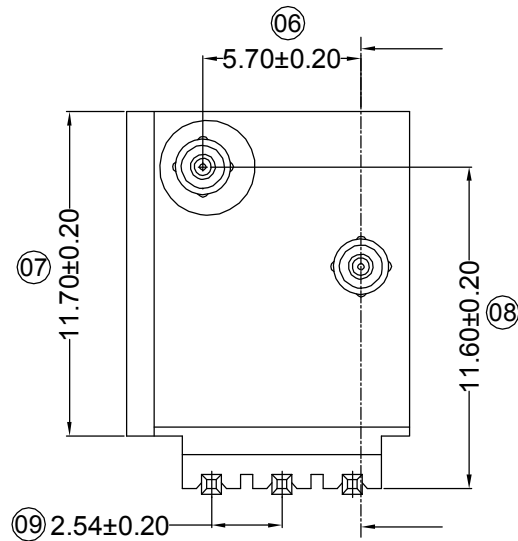

■ Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 3A AC / DC
- Withstanding voltage: 1000V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥1000MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤30mΩ

6621 W R XX- XX XX-PTXX XX

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨

① Series No.

② Category:

W-wafer

③ Welding Board Angle:

R-90°

④ Welding Way:

Blank-DIP

⑤ Row No.-Pin No.

XX-Single row

⑥ Special NO.

⑦ Material:

PT-PBT 94V-0

⑧ Planting Category:

V**:All Gold-Plated

*01-Gold Flash ; *02-2u" ; *03-3u" ; *05-5u"

*10-10u" ; *15-15u" ; *30-30u" ; *50-50u"

SN-Bright tin plating 70u"

SN1-Bright tin plating 120u"Min. ;

SW-Fog Tin plating

⑨ Color:

Blank-natural color

6621WR-XX-PTV01	PBT UL 94V-0	Brass	Gold-Flash	2530H
6621WR-XX-PTSN	PBT UL 94V-0	Brass	Tin-Plated	
PART NO	Material	Material(Pin)	Finish(Pin)	Mates With ADZL Housing

GENERAL
TOLERANCE

.X ±0.30

.XX ±0.20

.XXX ±0.10

东莞市思量连接器有限公司
DONGGUAN ADZL CONNECTORS CO.,LTD

APPROVAL

CHECK

DRAWN

DATA

PROJECT



Ken

Wisely He

Allen

2017/05/06

PART NO.

6621WR-XX-PTXX

TITLE

2.54 mm Crimp Style Connectors

UNIT

MM

SCALE

1 : 1

NUMBER

A-007

REV

D

DATE

OLD
REVNEW
REV

ECN

DESCRIPTION

CHECK

APPROVAL

1

2

3

4

5

6

7

8