
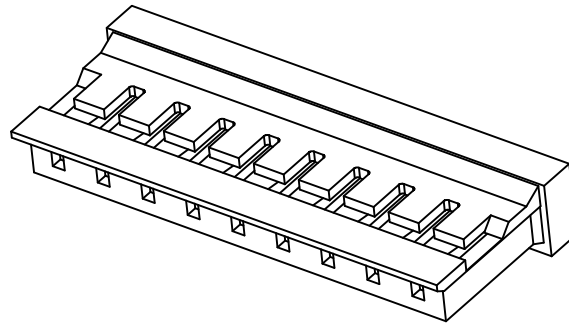




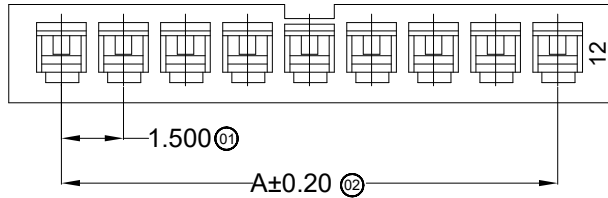


Specifications :

- Voltage rating: 250V AC / DC
- Current rating: 2A AC / DC
- Withstanding voltage: 100V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance:≥100MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤40mΩ

1520 H X-XX X-LP HF
 01 02 03 04 05 06 07

- ① Series No.
- ② Category: H-HSG
- ③ Welding Board Angle: Blank-ordinary
- ④ Row No.-Pin No.: XX-02P~15P
- ⑤ Plug the Pin & special No.:
- ⑥ Material: LP-LCP 94V0
- ⑦ HF-Halogen Free

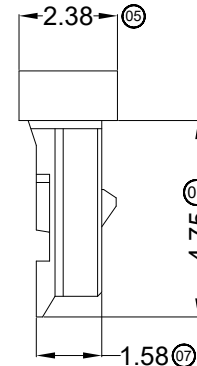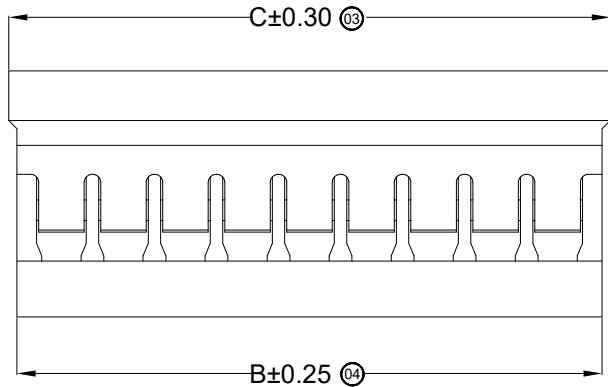

Poles	Dimensions (mm)			Poles	Dimensions (mm)		
	A	B	C		A	B	C
02	1.50	3.70	4.10	09	12.00	14.20	14.60
03	3.00	5.20	5.60	10	13.50	15.70	16.10
04	4.50	6.70	7.10	11	15.00	17.20	17.60
05	6.00	8.20	8.60	12	16.50	18.70	19.10
06	7.50	9.70	10.10	13	18.00	20.20	20.60
07	9.00	11.20	11.60	14	19.50	21.70	22.10
08	10.50	12.70	13.10	15	21.00	23.20	23.60

1520H-XX-LP	LCP UL 94V-0	1520T	1520W
PART NO	Material	Suitable ADZL Terminal	Mates With ADZL Wafer

							PART NO. 1520H-XX-LP			
							TITLE 1.50mm Crimp Style Connectors			
							UNIT MM	SCALE 1 : 1	NUMBER	REV
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	Ken	Zhao Hong	Allen	2023/11/10



GENERAL TOLERANCE
 .X ±0.30
 .XX ±0.20
 .XXX ±0.10




东莞市思量连接器有限公司
 DONGGUAN ADZL CONNECTORS CO.,LTD.

APPROVAL CHECK DRAWN DATA

UNIT MM SCALE 1 : 1 NUMBER REV

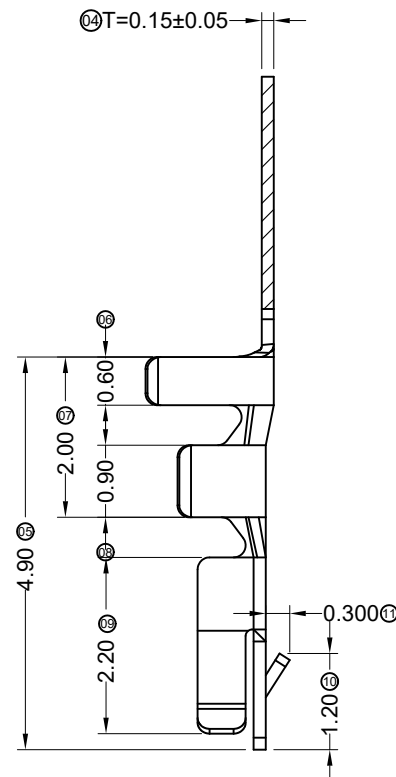


SECTION B-B
SCALE 1 : 1



SECTION C-C

SCALE 1 : 1

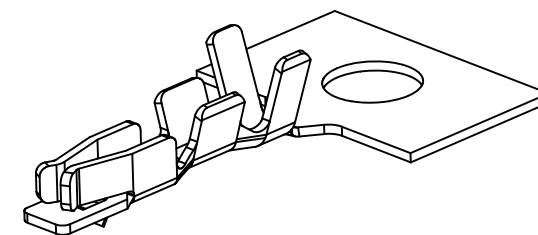

- Voltage rating: 250V AC / DC
- Current rating: 2A AC / DC
- Withstanding voltage: 100V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: $\geq 100\text{M}\Omega$
- Contact resistance: $\leq 20\text{m}\Omega$
- After environmental testing: $\leq 40\text{m}\Omega$

1520 T X-P XX X-X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series Number
- ② Category: T-terminal
- ③ Shape: Blank-ordinary
- ④ Material: P-Phosphor bronze
- ⑤ Plating Style: G05-Contact Gold 5u"
V01-Gold Flash
- ⑥ Plating method: Blank-Stamping before plating
Mold No./Mark/Special No.

1520T-PG05	Phospho Bronze	AWG#26-30	1.00mm MAX	Stamping Before Pating:30u" Ni ; Contact Gold :Gold 5u"	1520H
1520T-PV01				Stamping Before Pating:30u" Ni ; Contact Gold :Gold Flash	
PART NO	Material	Wire Range	Insulation O.D.	Finish	Used In ADZL Housing

							GENERAL TOLERANCE .X ±0.30 .XX ±0.20 .XXX ±0.10	 东莞市思量连接器有限公司 DONGGUAN ADZL CONNECTORS CO.,LTD.	PART NO. 1520T-PXXX							
									TITLE 1.50mm Crimp Style Connectors							
									APPROVAL	CHECK	DRAWN	DATA				
DATE	OLD REV	NEW REV	ECN	DESCRIPTION	CHECK	APPROVAL	PROJECT 	Ken	Zhao Hong	Allen	2013/08/31	UNIT MM	SCALE 1 : 1	NUMBER	REV	
1			2		3		4		5		6		7		8	